

Barriers on a stairway, aligned at right angles to the direction of movement must be 1.1m high with a design load of **3.0 Kn/m**


Barriers on a stairway, aligned with the direction of movement must be 1.1m high with a design load of **2.0 Kn/m**

Barriers adjacent to end row of seats and behind rear row of seats must be built to a height of 1.1m and design load of **1.0 Kn/m**

Barriers within 530mm of the front row of fixed seats can be 790mm high with a design load of **1.5 Kn/m**

Barriers at the foot of a gangway must be 1.1m high and to a design load of **3.0Kn/m**

Side and lateral barriers aligned parallel to the direction of spectator movement must be 1.1m high with a design load of **2.0 Kn/m**

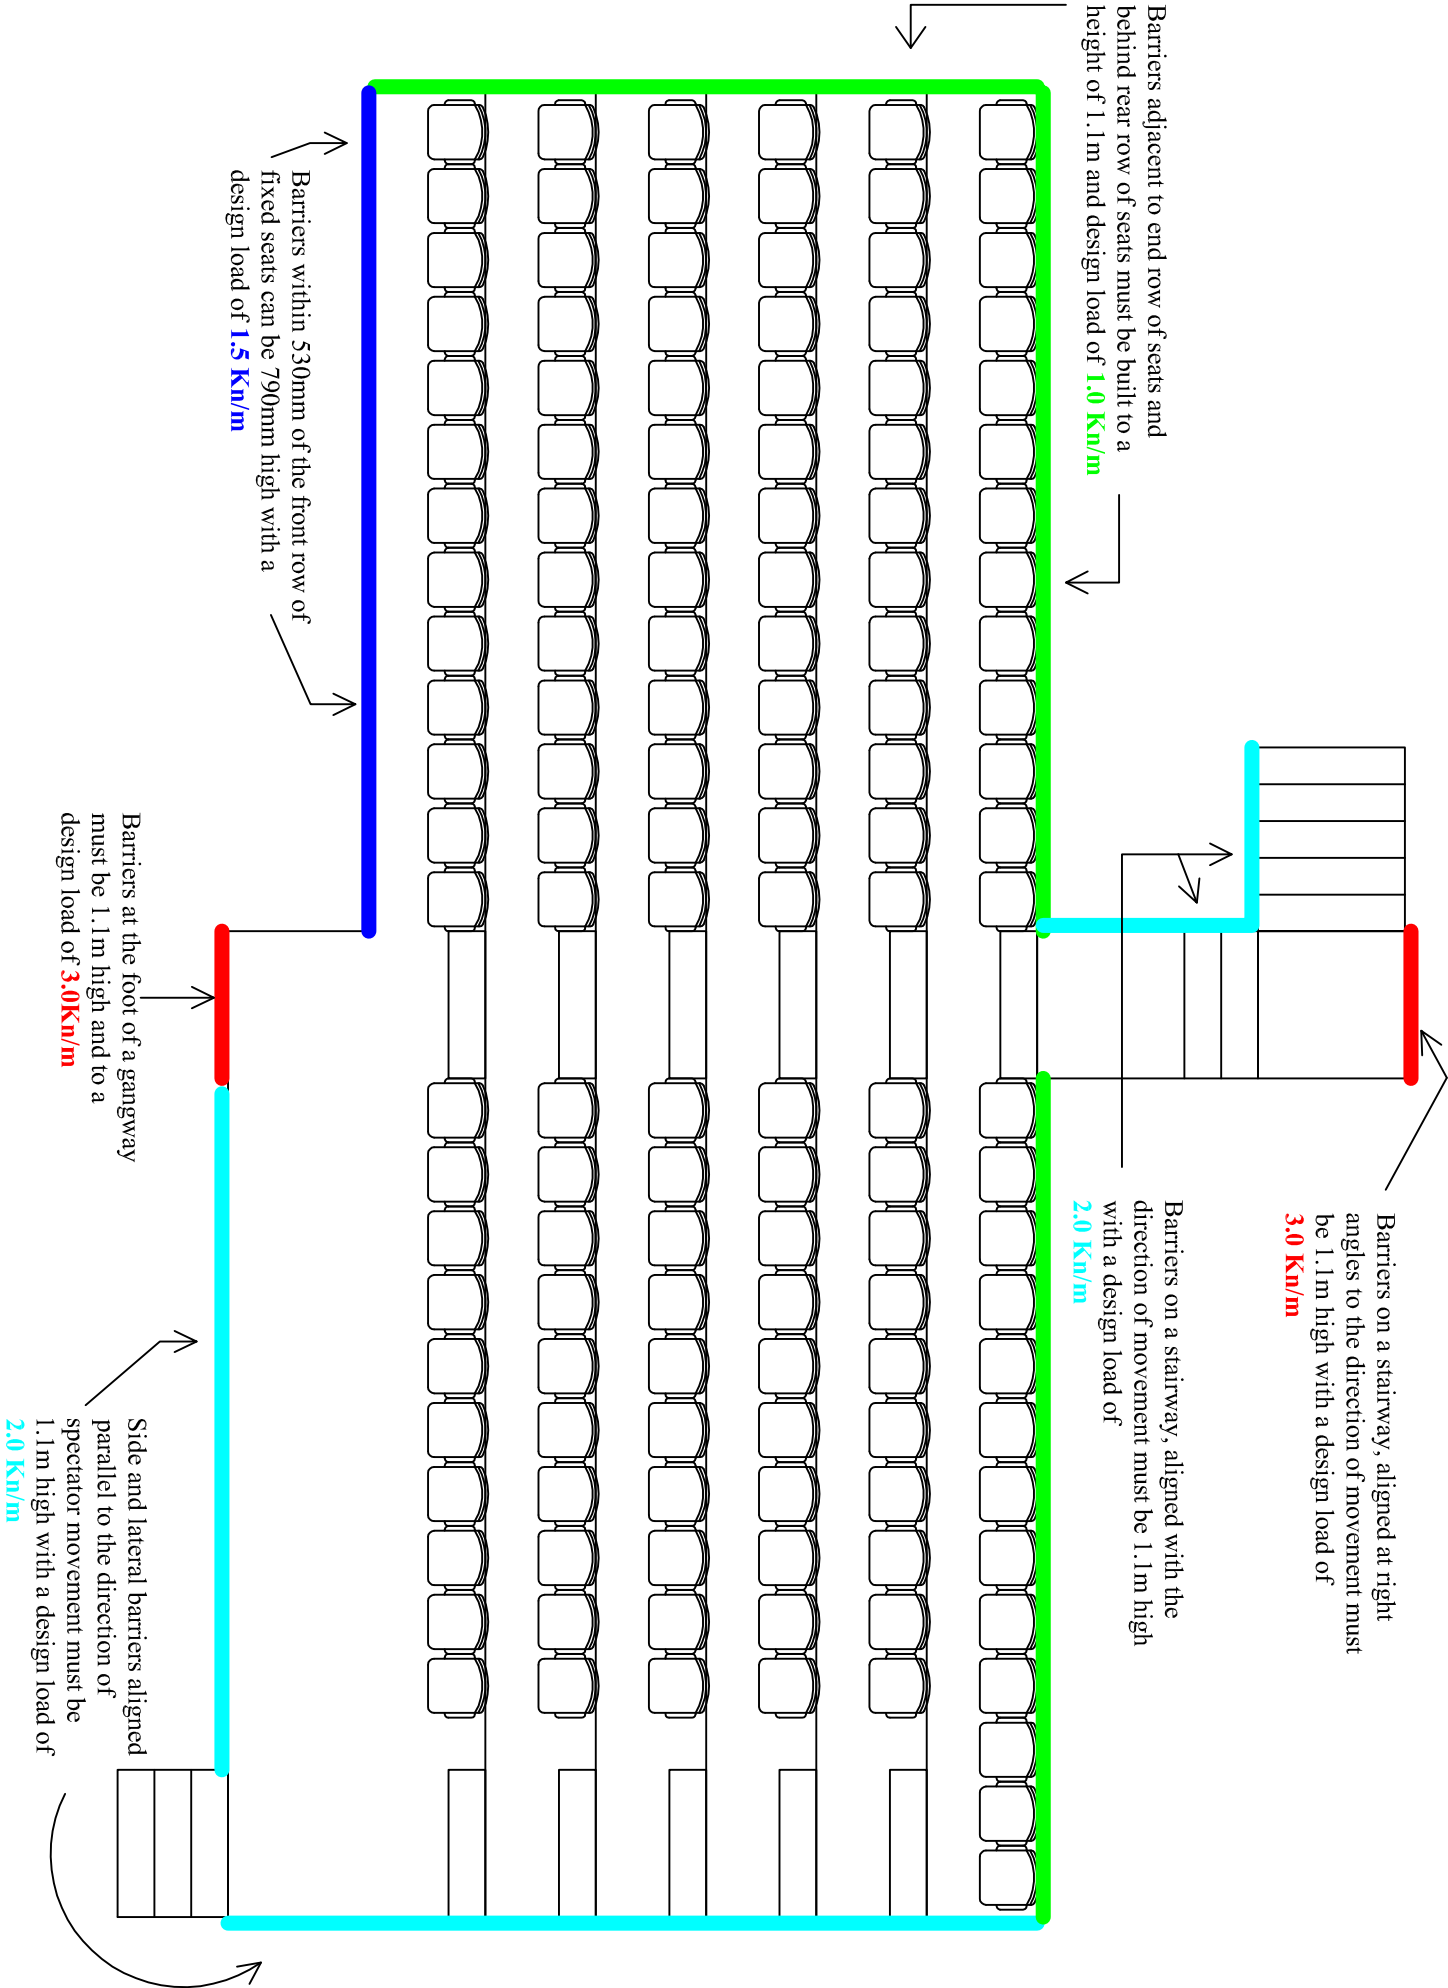

ERROR: syntaxerror
OFFENDING COMMAND: --nostringval--

STACK:

/Title
()
/Subject
(D:20090813140022+01'00')
/ModDate
()
/Keywords
(PDFCreator Version 0.9.5)
/Creator
(D:20090813140022+01'00')
/CreationDate
(richard)
/Author
-mark-